



# intAct GEL-Power

Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

## GEL-115

Volt	12V
Capacity	94 AH (c5), 115 AH (c20), 130 AH (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	286 x 269 x 230 mm
Weight	39 kg
Pos. of Terminal	4
Terminal	1
Base plate	-

### Usage

## Strong and maintenance-free


Perfect for professional storage and supply needs associated with renewable energy systems, coaches, campers or boats. Withstands charging-current fluctuations, relative deep discharges and continuous recharging. Our recommendation for anyone looking for a more cycle-resistant, spill-proof supply battery.

- » **For medium to heavy cyclic use.** 400 - 700 cycles according to IEC 254-1.
- » **Longer service life than flooded lead-acid battery.**
- » **High vibration resistance.**
- » **Low self-discharge.**
- » **In 4-volt, 6-volt and 12-volt versions.**
- » **Sealed GEL battery** with grid plates.
- » **VRLA battery with gas recombination and safety valves,** where refilling is neither possible or necessary.


### Size

Kasten: GEL-115

### Pos. of Terminal 4



### Terminal 1

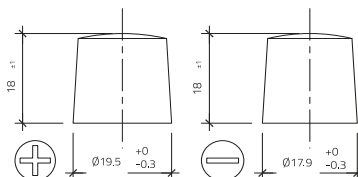

### Base plate -

As of 26.02.2024