



# intAct GEL-Power

Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free


Art.No.

## GEL-200-06

Volt	6V
Capacity	180 AH (c5), 200 AH (c20), 230 AH (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	244 x 190 x 275 mm
Weight	33 kg
Pos. of Terminal	1
Terminal	1
Base plate	-



### Usage

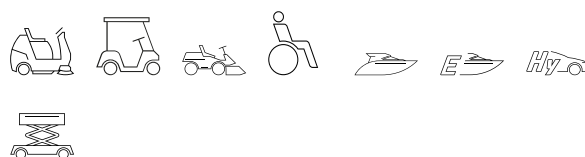


### Minimal maintenance during use


Perfect for increased demand in terms of performance and availability associated with electric vehicles for commercial, leisure and travel purposes. Reliable in shift operation and maintenance-free. Our recommendation when a leak-proof traction battery is required.

- » For medium to heavy cyclical use. 400 - 700 cycles according to IEC 254-1.
- » Longer service life than flooded lead-acid batteries.
- » High vibration resistance.
- » Low self-discharge.
- » Available in 4-volt, 6-volt and 12-volt versions.
- » VRLA battery with gas recombination and safety valves, refilling is neither possible or necessary.
- » Sealed GEL battery with grid plates.


#### Size



#### Pos. of Terminal 1



#### Terminal 1

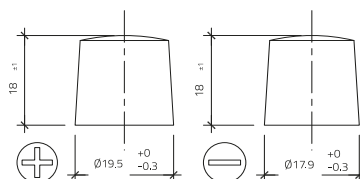

#### Base plate -

As of 24.01.2024