



# intAct GEL-Power

Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

## GEL-60B

|                     |                                       |
|---------------------|---------------------------------------|
| Volt                | 12V                                   |
| Capacity            | 51 AH (c5), 60 AH (c20), 65 AH (c100) |
| CCR -18°C (EN)      | -                                     |
| Electrolyte         | diluted sulphuric acid                |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C)            |
| Size (LxWxH)        | 278 x 175 x 190 mm                    |
| Weight              | 21 kg                                 |
| Pos. of Terminal    | 0                                     |
| Terminal            | 1                                     |
| Base plate          | B13                                   |


### Usage

## Strong and maintenance-free


Perfect for professional storage and supply needs associated with renewable energy systems, coaches, campers or boats. Withstands charging-current fluctuations, relative deep discharges and continuous recharging. Our recommendation for anyone looking for a more cycle-resistant, spill-proof supply battery.

- » **For medium to heavy cyclic use.** 400 - 700 cycles according to IEC 254-1.
- » **Longer service life than flooded lead-acid battery.**
- » **High vibration resistance.**
- » **Low self-discharge.**
- » **In 4-volt, 6-volt and 12-volt versions.**
- » **Sealed GEL battery** with grid plates.
- » **VRLA battery with gas recombination and safety valves,** where refilling is neither possible or necessary.


Size




Pos. of Terminal 0



Terminal 1

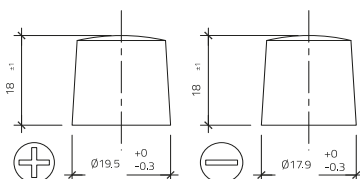

Base plate B13

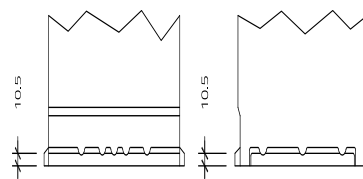

As of 14.12.2023